

DMP PIV Priority Smart Card Service Plugin v1.0.1 for Xerox 53XX, C60/70, & V80/180

New Content in this Plugin release:

- 1) **FR-17679 Support for Giesecke & Devrient Sm@rtCafe Expert v7.0 144K DI smart card with CAC 2.7.6 Applet (STOPGAP)** Giesecke & Devrient SmartCare Expert v7.0 smart card with CAC 2.7.6 Applet and ATR 3B F9 18 00 00 00 53 43 45 37 20 03 00 20 46 is now supported when configured for PIV authentication.
- 2) **FR-17679 Support for PIV Authentication with Dual Identity Smartcards**
These plugins enable users with dual identity smartcards containing both CAC identity and PIV certificates to authenticate when the User is setup in AD with their 16 digit PIV ID.


Installation Instructions: (Software Version: 53XX family 53.33.75 or higher; other DMP products load the Latest available SPaR)
53.33.75 Software Link: <http://www.support.xerox.com/support/workcentre-5300-series/file-download/enus.html?contentId=139787>

1. Extract all files from the zip file to a convenient location on your computer.
2. Open Internet Explorer and enter the Printers IP address into the address field (Enter)
3. Enter login credential: Username: admin Default Password: 1111
4. Select **Properties / Security / Plugin Settings**. The following screen will appear:
5. Select **Enabled** checkbox and **Apply**. (If already enabled continue to step 6)




-- Continue to next page --

6. **Reboot** the device: Select the **Status** tab, scroll down and select **Reboot machine**

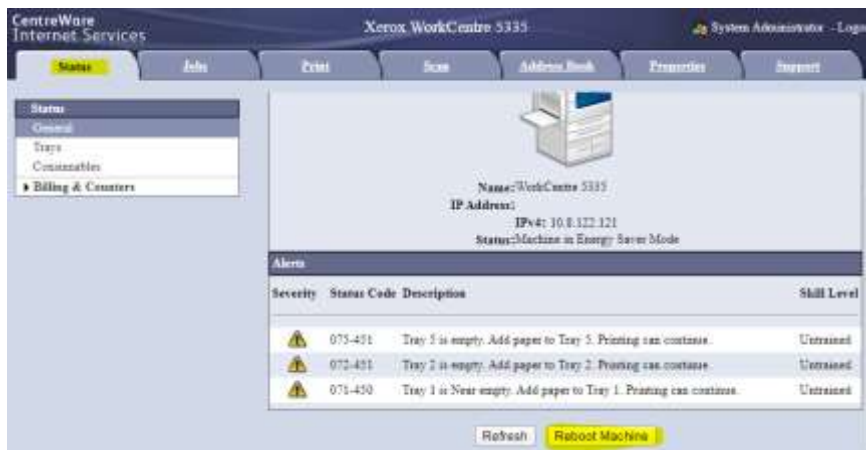

7. Select **Properties / Security / Plugin Settings / List of Embedded Plug-in Settings**. The following screen will appear:

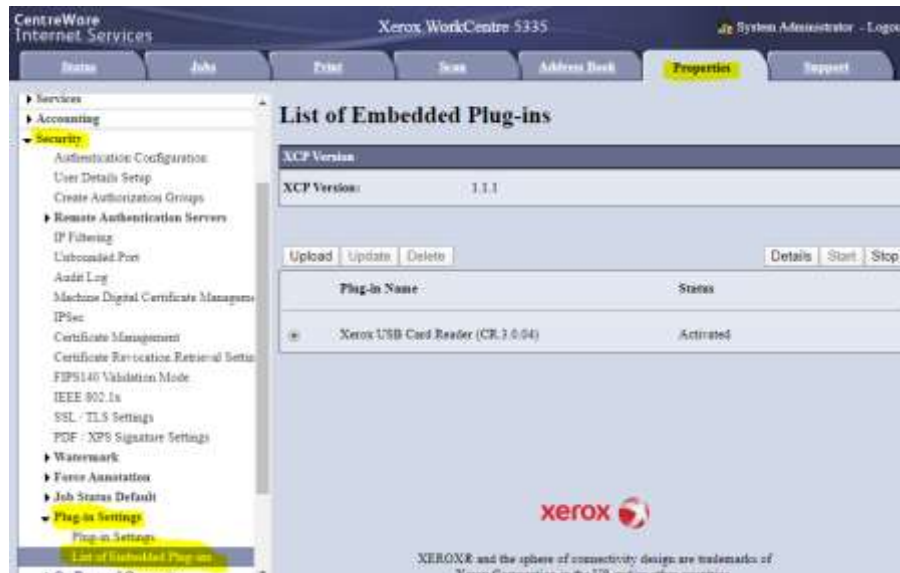

8. Upload the PIV Priority Plugin by:
- If a previous plug-in is installed Select **Upload** then **Choose File**; else select **Choose File**
 - Navigate to the location the new plug-ins were extracted and saved in Step 1
 - Select** the PIV Priority or CAC Priority Plugin file and Select **Upload**
 - PIVPrioritySmartcardServicePlugin-v1.0.1_sig.jar
 - Do not reboot at this time.
9. Upload the CCID_Terminal_Plugin-0.9.9 by:
- Select **Upload** then **Choose File**
 - Navigate to the plugin location
 - Select the CCID_Terminal_Plug-in file and Select **Upload**
 - CCID_Terminal_Plugin-0.9.9
 - Do not reboot at this time.

-- Continue to next page --

10. **Deactivate** any already activated card reader plugin such as Xerox USB Card Reader Plugin.
 - a. If displayed, select the Radio button next to the Xerox USB Card Reader (CR.X.X.XX) plug-in
 - b. Select **Stop** and **OK** when prompted to deactivate the plug-in.

List of Embedded Plug-ins

XCP Version	
XCP Version:	1.1.1

Plug-in Name	Status
<input checked="" type="radio"/> Xerox USB Card Reader (CR.3.0.04)	Reboot to Deactivate
<input type="radio"/> PIV Priority Smartcard Service Plugin	Reboot to Activate
<input type="radio"/> CCID Terminal Plugin	Reboot to Activate

11. **Reboot** the device to activate the new plugins & deactivate the previous plug-in.
 - a. Select the **Status**
 - b. Scroll down and Select **Reboot Machine**

CentreWare Internet Services Xerox WorkCentre 5335 System Administrator - Logout

Status
 General
 Trays
 Consumables
 Billing & Counters

Name: WorkCentre 5335
 IP Address: IPv4: 10.8.122.121
 Status: Machine in Energy Saver Mode

Alerts

Severity	Status Code	Description	Skill Level
Warning	075-451	Tray 5 is empty. Add paper to Tray 5. Printing can continue.	Untrained
Warning	072-451	Tray 2 is empty. Add paper to Tray 2. Printing can continue.	Untrained
Warning	071-450	Tray 1 is Near empty. Add paper to Tray 1. Printing can continue.	Untrained