

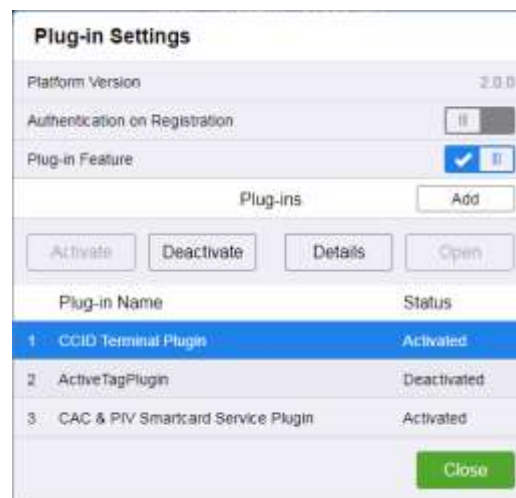


Xerox VersaLink Dual Persona PIV Smart Card Authentication Plugin Guide

1. Obtain and save the VersaLink plug-in: [PIVPrioritySmartcardServicePlugin-v1.0.0_sig.jar](#)
2. **Log in to CWIS:** Open Internet Explorer & the printers IP address in the address field.
3. Click on **Log In**, enter user name “**admin**” & password “**1111**” or current password.
4. Select **System**
5. Select **Plug-in Settings**.
6. The screen should appear similar to the image below; order does not matter. The ActiveTagPlugin may or may not appear, if it does appear the status should be set to ‘Deactivated’ as it is not required.

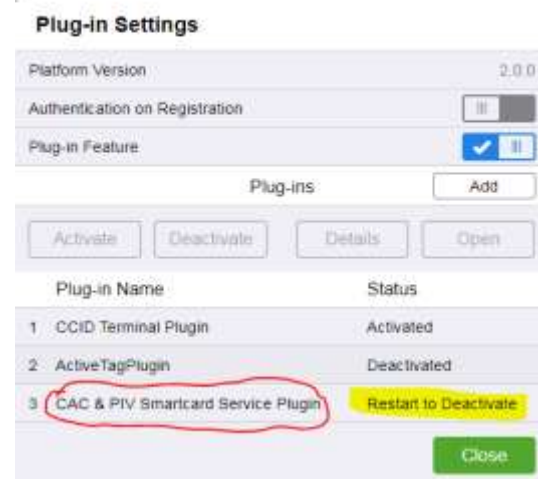

7. Select the **CAC & PIV Smartcard Service Plugin**; then select the **Deactivate** button. The Status will change to **Restart to Deactivate**. (Refer to images below)
8. Select **Close**
9. **Restart the system:** Select **Home** – scroll down, select **Support** – Select **Restart Device ...** confirm **Restart**. (Wait 2 minutes and log back in, refer to step # 2)

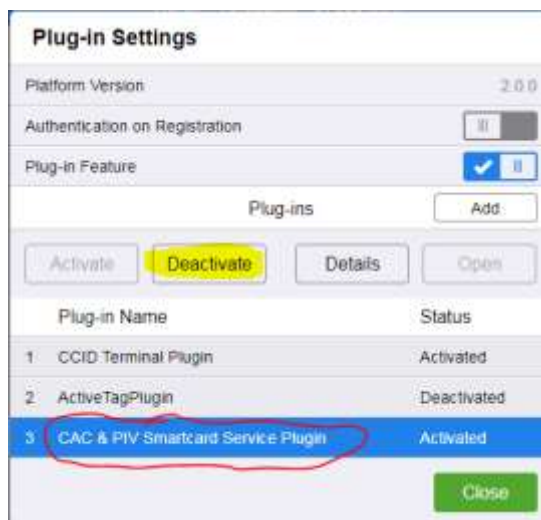

10. Select **System**
11. Select **Plug-in Settings**.
12. The screen should appear as below; ActiveTagPlugin may or may not show; if it is displayed it can be deactivated.

Plug-in Settings

Platform Version: 2.0.0

Authentication on Registration: ☐

Plug-in Feature: ☒

Plug-ins:

	Plug-in Name	Status
1	CCID Terminal Plugin	Activated
2	ActiveTagPlugin	Deactivated
3	CAC & PIV Smartcard Service Plugin	Deactivated

13. Select any deactivated plugins, select “Details”, and select “Delete”.
(The ActiveTagPlugin can be deleted, however if deactivated it will not cause any harm)

Plug-in Settings

Platform Version: 2.0.0

Authentication on Registration: ☐

Plug-in Feature: ☒

Plug-ins:

	Plug-in Name	Status
1	CCID Terminal Plugin	Activated
2	ActiveTagPlugin	Deactivated
3	CAC & PIV Smartcard Service Plugin	Deactivated



Plug-in Information

Plug-in Name: CAC & PIV Smartcard Service Plugin

Status: Deactivated

Version: 0.9.2

14. Select **Add** and **browse** to the Plug-in: **PIVPrioritySmartcardServicePlugin-v1.0.0_sig.jar**
15. Select **OK**.
16. Select **Close**

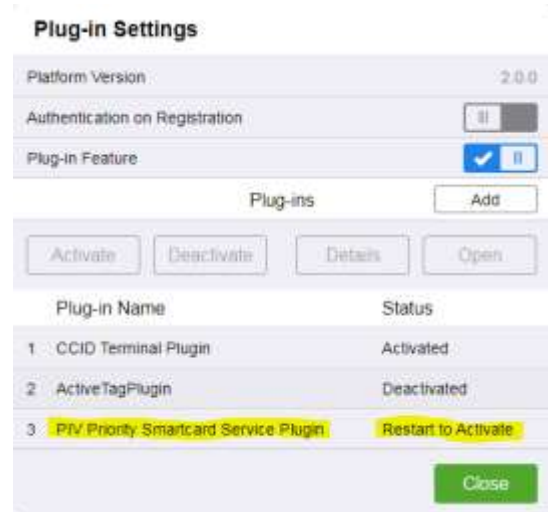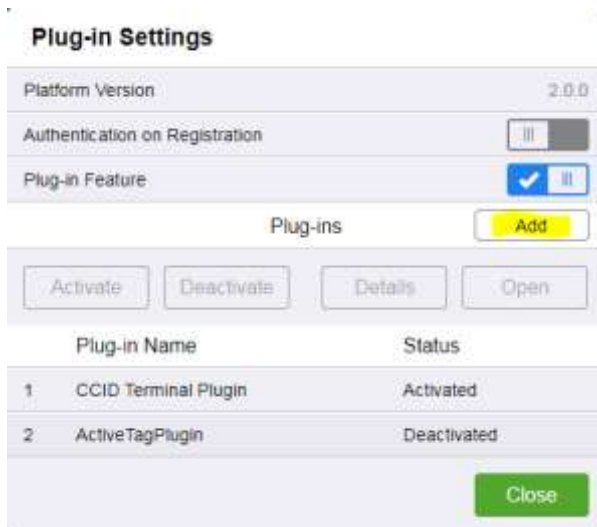

17. Your USB CAC/PIV Smart Card reader should be connected to the VersaLink MFD at this time.
18. **Restart the system:** Select **Home** – scroll down, select **Support** – Select **Restart Device ...** confirm **Restart**.

Verify plug-in installation

1. **Log in to CWIS:** Open Internet Explorer & the printers IP address in the address field.
2. Click on **Log In**, enter user name “**admin**” & password “**1111**” or current password.
3. Select **System**
4. Select **Plug-in Settings**.
5. ActiveTagPlugin should be Deactivated if displayed.

